

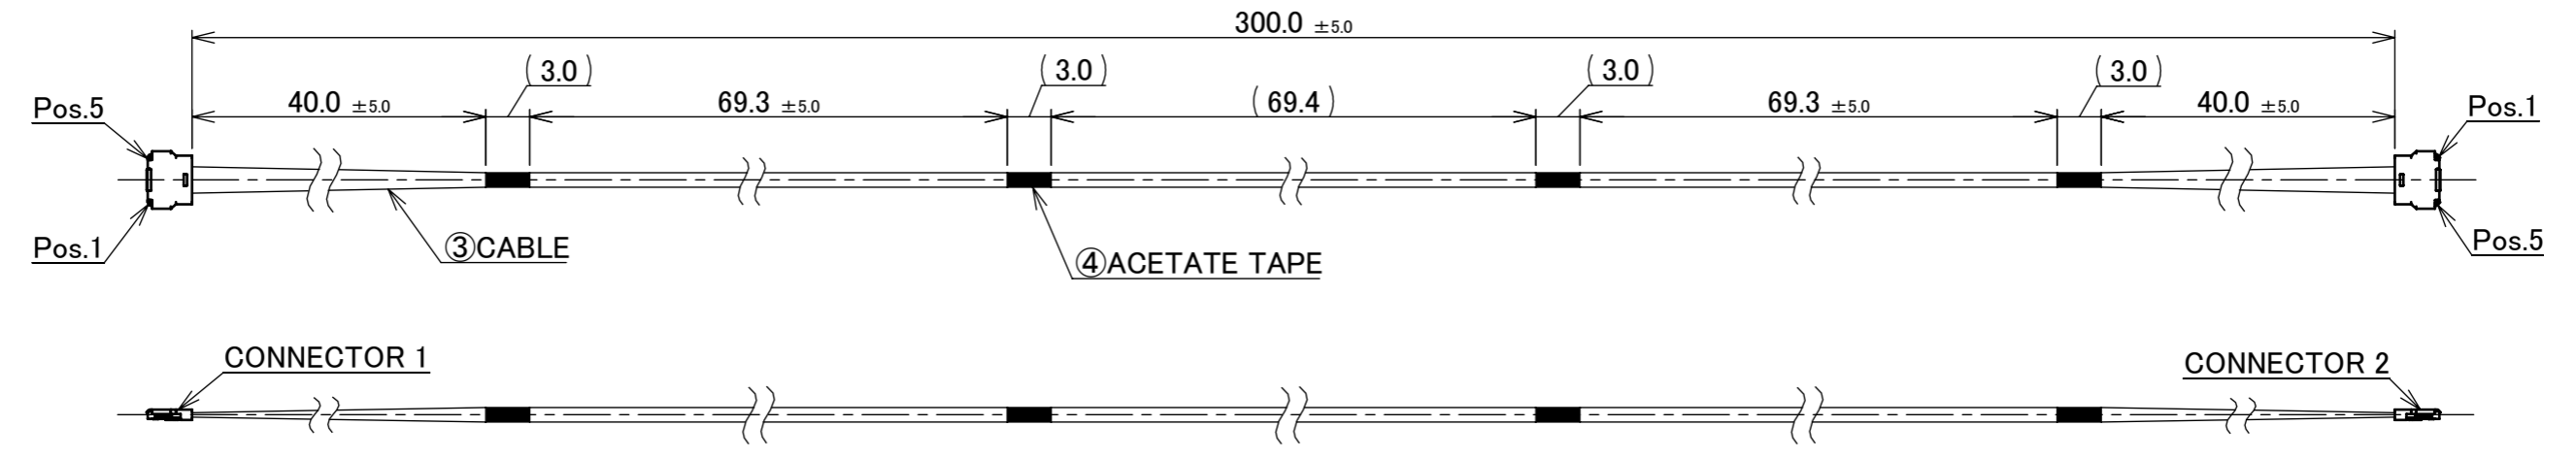


PART No.
81426-100B-01-D

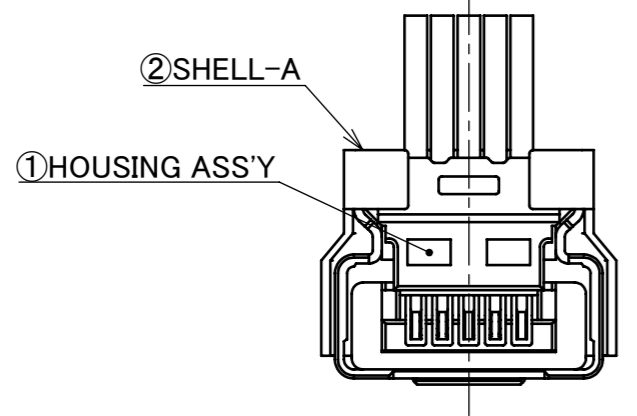

CONNECTOR 1&2
(S=10/1)

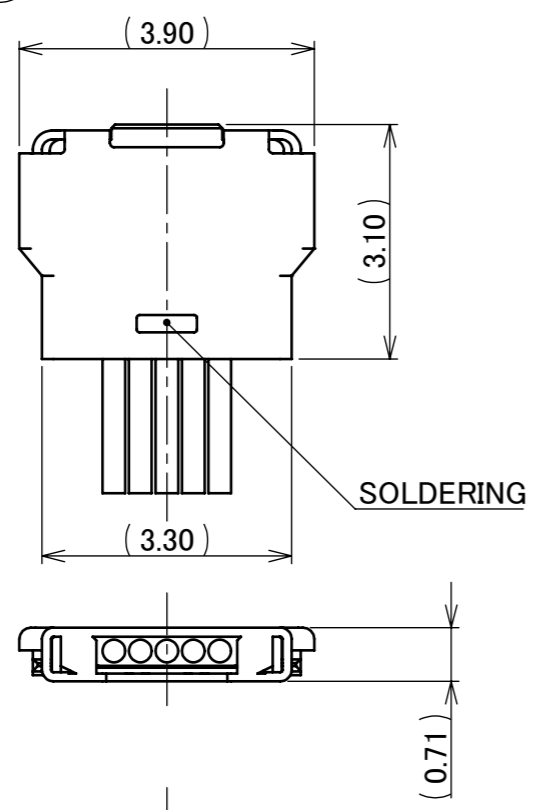

PIN ASSIGNMENT		
CONNECTOR 1	CABLE	CONNECTOR 2
5	MICRO-COAXIAL, AWG#42 50 OHM, BLUE	1
4	MICRO-COAXIAL, AWG#42 50 OHM, BLUE	2
3	MICRO-COAXIAL, AWG#42 50 OHM, BLUE	3
2	MICRO-COAXIAL, AWG#42 50 OHM, BLUE	4
1	MICRO-COAXIAL, AWG#42 50 OHM, BLUE	5

NOTE.

1. TO HANDLE THIS CONNECTOR
YOU MUST READ AND FOLLOW THE INSTRUCTION MANUAL BELOW.
I-PEX INSTRUCTION MANUAL No.HIM-18037.

2. ELECTRIC CHARACTERISTICS
WITHSTANDVOLTAGE : AC 200V(1SEC.) LEAKAGE CURRENT 2.0mA MAX.
INSULATION RESISTANCE : 50MΩ MIN. DC 100V (0.5SEC.)

NO.	DESCRIPTION	PARTS NO.	QTY	REMARKS
4	ACETATE TAPE	-	4	BLACK
3	CABLE	-	5	MICRO-COAXIAL AWG #42, 50 OHM, BLUE
2	SHELL-A	3568-0051	2	CONNECTOR 1&2 CABLIN [®] -UY PLUG P/N : 20857-005T-01 CONNECTOR TO BE MATED : 20854-005E-02
1	HOUSING ASS'Y	20907-005E-01	2	

For DIGI-KEY CORPORATION										
				ANGLE	±2°	6 OVER 30 MAX.	±0.3	PROJECTION	SERIES No.	CUSTOMER COPY
					6 MAX.	±0.2	30 OVER 120 MAX.	±0.5	IH-210016	
				GENERAL TOLERANCE.				TITLE		SCALE
				DWG.	DATE		CABLIN [®] -UY 5P		2:1	
				CHK.				HARNESS		UNIT
				R.Takei						mm
				APP.				DWG. No.		SIZE
				H.Ikari				81426		A3
REVISION RECORD										SHEET
										1/1
										REV.
										0