



Application Note AN6040

Spread Spectrum Clock Generator: $\pm 0.25\%$ Center Spread

This document describes the programmed values and functions of CY22800FXC-015A. Refer to the CY22800 data sheet for detailed product description and specifications.

Features


- Wide input and output frequency ranges
- Low cycle-to-cycle jitter

Table 1. Device Specifications

Code Number	Input Frequency Range (MHz)	Output Frequency Range (MHz)	Number of Outputs	Special Function
CY22800FXC-015A	25–100 (CLKIN) 25–30 (Crystal)	25 MHz–100 MHz	2	$\pm 0.25\%$ Center Spread


Architecture

Figure 1. Logic Block Diagram

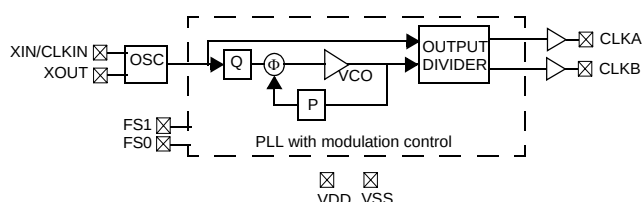

Pinouts

Figure 2. Pin Configuration



Frequency

Table 2. Frequency Table

FS[1:0]	CLKIN (MHz)	Xtal (MHz)	CLKA	CLKB
00	25–100	25–30	1xREFIN (Spread ON)	REFOUT (Spread OFF)
01	25–100	25–30	1xREFIN (Spread OFF)	REFOUT (Spread OFF)
10	25–100	25–30	1xREFIN (Spread ON)	1xREFIN (Spread ON)
11	25–100	25–30	1xREFIN (Spread ON)	(1xREFIN)/2 (Spread ON)

AC/DC Parameters

Table 3. AC/DC Parameters

Parameter ^[1]	Description	Typical Value	Unit
t_1	Cycle-to-cycle Jitter	60 ^[2]	ps
I_{DD}	Current Consumption	18 ^[3]	mA

Ordering Information

Table 4. Ordering Information

Part Number ^[4]	Package Type	Product Flow
CY22800FXC-015A	8-pin SOIC - Lead Free	Commercial, 0 to 70°C

All products and company names mentioned in this document may be the trademarks of their respective holders.

Notes

1. Refer to the CY22800 generic data sheet for a complete list of AC/DC parameters.
2. Measurements made on CLKA under nominal conditions (VDD = 3.3V, room temperature, 15 pF load cap.) with FS[1:0] = 10.
3. Measurements made under nominal conditions (VDD = 3.3V, room temperature, no load) with FS[1:0] = 11.
4. When ordering from a distributor, use CY22800FXC with the specific code number (015A).

July 13, 2006

Revision **

- 1 -

© Cypress Semiconductor Corporation, 2006. The information contained herein is subject to change without notice. Cypress Semiconductor Corporation assumes no responsibility for the use of any circuitry other than circuitry embodied in a Cypress product. Nor does it convey or imply any license under patent or other rights. Cypress products are not warranted nor intended to be used for medical, life support, life saving, critical control or safety applications, unless pursuant to an express written agreement with Cypress. Furthermore, Cypress does not authorize its products for use as critical components in life-support systems where a malfunction or failure may reasonably be expected to result in significant injury to the user. The inclusion of Cypress products in life-support systems application implies that the manufacturer assumes all risk of such use and in doing so indemnifies Cypress against all charges.