



# CYPRESS

---

---

## Programmable High-Frequency Crystal Oscillator (XO)

CY25702

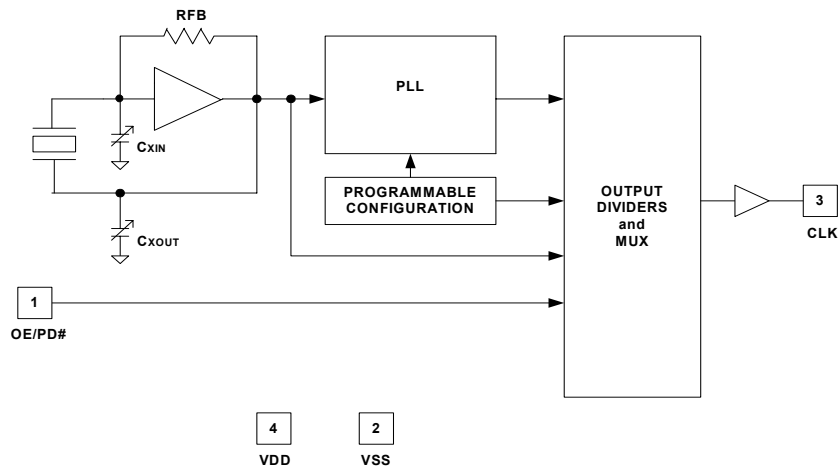
### Features

- Programmable High-frequency Crystal Oscillator (XO)
- Wide output (CLK) range from:
  - 1.0 to 125 MHz ( $V_{DD} = 5.0V$ )
  - 1.0 to 90 MHz ( $V_{DD} = 3.3V$ )
- Integrated phase-locked loop (PLL)
- Low cycle-to-cycle Jitter
- 3.3/5.0V operation
- Output Enable function
- Power-down function
- Refer to CY25701 for SSCG function
- Lead-free package

### Benefits

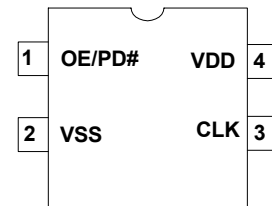
- Eliminates the need for external crystal oscillator.
- Internal PLL to generate up to 125-MHz output.
- Suitable for most PC, consumer and networking applications.
- Application compatibility in standard and low-power systems.
- CY25701 can be used as a direct replacement in 3.3V applications if Spread Spectrum Clock (SSC) is required for EMI reduction without any PCB modification.
- In-house programming of samples and prototype quantities is available using the CY3672 programming kit and CY36xx socket adapter. Sample and production quantities are available through Cypress's value-added distribution partners.

### Logic Block Diagram



### Pin Configuration

CY25702  
4-pin Plastic SMD



**Pin Definition**

Pin	Name	Description
1	OE/PD#	<b>Output Enable pin: Active HIGH.</b> If OE = 1, CLK is enabled. <b>Power Down pin: Active LOW.</b> If PD# = 0, Power Down is enabled.
2	VSS	<b>Power supply ground.</b>
3	CLK	<b>Clock output.</b>
4	VDD	<b>3.3V or 5.0V power supply.</b>

**Table 1. Programming Data Requirement**

Pin Function	Output Frequency	Output Enable/Power Down	Power Supply
Pin Name	CLK	OE/PD#	VDD
Pin#	3	1	4
Units	MHz	N/A	V
<b>Program Value</b>	<b>ENTER DATA</b>	<b>ENTER DATA</b>	<b>ENTER DATA</b>

**Functional Description**

The CY25702 is a Crystal Oscillator (XO).

The device uses a Cypress proprietary PLL to synthesize the frequency of the embedded input crystal.

The CY25702 uses a programmable configuration memory array to synthesize output frequency.

The frequency CLK output can be programmed from 10–125 MHz.

The CY25702 is available in a 4-pin plastic SMD packages with operating temperature range of –20 to 70°C.

**Programming Description**
**Field/Factory-Programmable CY25702**

Field/Factory programming is available for samples and manufacturing by Cypress and its distributors. All requests must be submitted to the local Cypress Field Application Engineer (FAE) or sales representative. Once the request has been processed, you will receive a new part number, samples, and data sheet with the programmed values. This part number will be used for additional sample requests and production orders.

**Operating Conditions**

Parameter	Description	Min.	Typ.	Max.	Unit
V <sub>DD1</sub>	Supply Voltage Range	3.00	3.30	3.60	V
V <sub>DD2</sub>	Supply Voltage Range	4.50	5.00	5.50	V
T <sub>A</sub>	Ambient Temperature	–20	–	70	°C
C <sub>LOAD</sub>	Max. Load Capacitance @ pin 3	–	–	15	pF
F <sub>CLK1</sub>	CLK output frequency, C <sub>LOAD</sub> = 15 pF, V <sub>DD</sub> = 5.0V	1.0	–	125	MHz
F <sub>CLK2</sub>	CLK output frequency, C <sub>LOAD</sub> = 15 pF, V <sub>DD</sub> = 3.3V	1.0	–	90	MHz
T <sub>PU</sub>	Power-up time for VDD to reach minimum specified voltage (power ramp must be monotonic)	0.05	–	500	ms

Additional information on the CY25702 can be obtained from the Cypress web site at [www.cypress.com](http://www.cypress.com).

**Output Frequency, CLK Output (CLK, pin 3)**

The frequency at the CLK output is produced by synthesizing the embedded crystal oscillator frequency input. The range of synthesized clock is from 1–125 MHz when V<sub>DD</sub> = 5V and 1–90 MHz when V<sub>DD</sub> = 3.3V.

**Output Enable or Power Down (OE/PD#, pin 1)**

Pin 1 can be programmed as either output enable (OE) or Power Down (PD#).

**Absolute Maximum Rating**

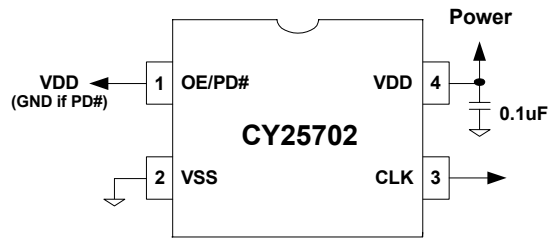
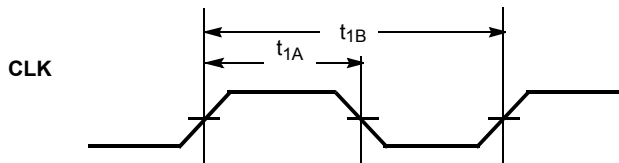
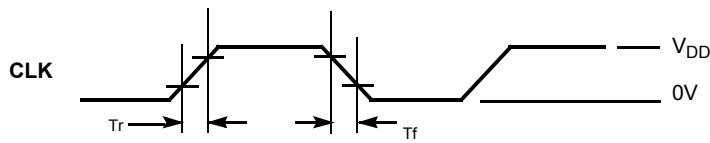
Supply Voltage (V <sub>DD</sub> )	–0.5V to +7.0V
DC Input Voltage	–0.5V to V <sub>DD</sub> + 0.5V
Storage Temperature (Non-condensing)	–55°C to +100°C
Junction Temperature	–40°C to +125°C
Data Retention @ T <sub>j</sub> = 125°C	> 10 years
Package Power Dissipation	350 mW

**DC Electrical Characteristics**

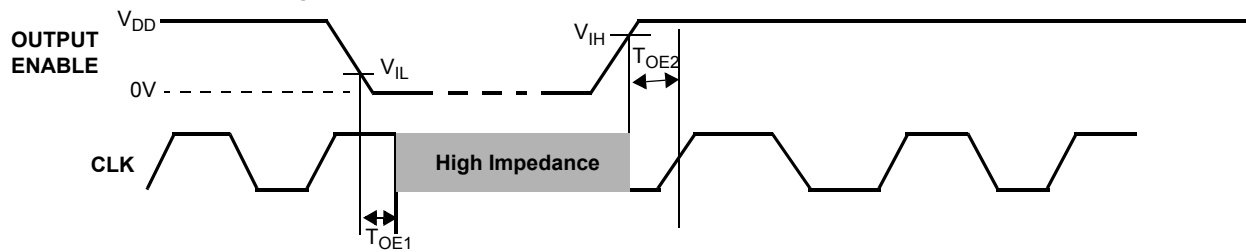
Parameter	Description	Condition	Min.	Typ.	Max.	Unit
V <sub>OH1</sub>	High Output Voltage	V <sub>DD</sub> = 5.0V, I <sub>OH</sub> = -16 mA	V <sub>DD</sub> - 0.4	-	-	V
V <sub>OL1</sub>	Low Output Voltage	V <sub>DD</sub> = 5.0V, I <sub>OL</sub> = 16 mA	-	-	0.4	V
V <sub>OH2</sub>	High Output Voltage	V <sub>DD</sub> = 3.3V, I <sub>OH</sub> = -8 mA	V <sub>DD</sub> - 0.4	-	-	V
V <sub>OL2</sub>	Low Output Voltage	V <sub>DD</sub> = 3.3V, I <sub>OL</sub> = 8 mA	-	-	0.4	V
V <sub>IH1</sub>	Input High Voltage (pin 1)	V <sub>DD</sub> = 5.0V	2.0	-	-	V
V <sub>IL1</sub>	Input Low Voltage (pin 1)	V <sub>DD</sub> = 5.0V	-	-	0.8	V
V <sub>IH2</sub>	Input High Voltage (pin 1)	V <sub>DD</sub> = 3.3V	0.7V <sub>DD</sub>	-	-	V
V <sub>IL2</sub>	Input Low Voltage (pin 1)	V <sub>DD</sub> = 3.3V	-	-	0.2V <sub>DD</sub>	V
I <sub>IH</sub>	Input High Current (pin 1)	V <sub>in</sub> = V <sub>DD</sub>	-	-	10	μA
I <sub>IL</sub>	Input Low Current (pin 1)	V <sub>in</sub> = V <sub>SS</sub>	-	-	10	μA
I <sub>OZ</sub>	Output Leakage Current (pin 3)	Three-state output, OE = 0	-10	-	10	μA
C <sub>IN</sub>	Input Capacitance (pin 1)	Pin 1, OE or PD#	-	5	7	pF
I <sub>VDD1</sub>	Supply Current	V <sub>DD</sub> = 3.3V, CLK = 1 to 90 MHz, C <sub>LOAD</sub> = 0, OE = V <sub>DD</sub>	-	-	28	mA
I <sub>VDD2</sub>	Supply Current	V <sub>DD</sub> = 3.3V, CLK = 1 to 90 MHz, C <sub>LOAD</sub> = 0, OE = GND	-	-	16	mA
I <sub>VDD3</sub>	Supply Current	V <sub>DD</sub> = 5.0V, CLK = 1 to 125 MHz, C <sub>LOAD</sub> = 0, OE = V <sub>DD</sub>	-	-	45	mA
I <sub>VDD4</sub>	Supply Current	V <sub>DD</sub> = 5.0V, CLK = 1 to 125 MHz, C <sub>LOAD</sub> = 0, OE = GND	-	-	30	mA
I <sub>PD#</sub>	Power Down Current	PD# = GND	-	-	50	μA
FS	Frequency Stability	-20 to +70°C	-50	-	50	ppm
AG	Aging	T <sub>a</sub> = 25°C, First Year	-5	-	5	ppm
SR	Shock Resistance	Three drops on a hard board from 750 mm or excitation test with 29.400m/s <sup>2</sup> x 0.3ms x 1/2 sinewave in three directions	-20	-	20	ppm

**AC Electrical Characteristics**

Parameter	Description	Condition	Min.	Typ.	Max.	Unit
DC	Output Duty Cycle	CLK, Measured at V <sub>DD</sub> /2	40	50	60	%
t <sub>R</sub>	Output Rise Time	20%–80% of V <sub>DD</sub> , C <sub>L</sub> = 15 pF	-	-	4.0	ns
t <sub>F</sub>	Output Fall Time	20%–80% of V <sub>DD</sub> , C <sub>L</sub> = 15 pF	-	-	4.0	ns
T <sub>OE1</sub>	Output Disable Time (pin1 = OE)	Time from falling edge on OE to stopped outputs (Asynchronous)	-	150	350	ns
T <sub>OE2</sub>	Output Enable Time (pin1 = OE)	Time from rising edge on OE to outputs at a valid frequency (Asynchronous)	-	150	350	ns
T <sub>LOCK</sub>	PLL Lock Time	Time for CLK to reach valid frequency	-	-	10	ms
T <sub>SU</sub>	Start-up time out of Power Down	PD# pin Low to High	-	-	5	ms
T <sub>PDD</sub>	Power Down Delay Time	PD# pin Low to CLK Low (Asynchronous)	-	-	25	ns
t <sub>J1</sub>	Cycle-to-cycle jitter V <sub>DD</sub> = 3.3V	1.0 MHz ≤ f <sub>o</sub> ≤ 125 MHz, C <sub>L</sub> = 15 pF	-	-	200	ps
t <sub>J2</sub>	Cycle-to-cycle jitter V <sub>DD</sub> = 5.0V	33 MHz ≤ f <sub>o</sub> ≤ 125 MHz, C <sub>L</sub> = 15 pF	-	-	150	ps
		1.0 MHz ≤ f <sub>o</sub> ≤ 33 MHz, C <sub>L</sub> = 15 pF	-	-	200	ps

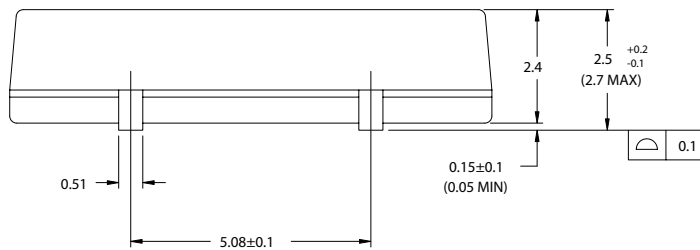
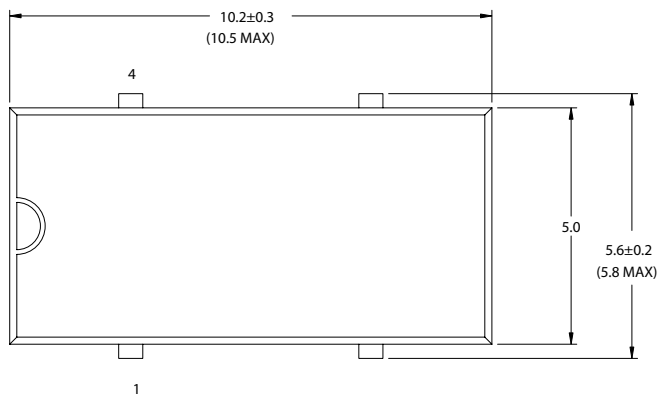
**Application Circuit**

**Switching Waveforms**
**Duty Cycle Timing (DC =  $t_{1A}/t_{1B}$ )**

**Output Rise/Fall Time**


Output Rise time ( $T_r$ ) = 20 to 80% of  $V_{DD}$   
 Output Fall time ( $T_f$ ) = 80 to 20% of  $V_{DD}$

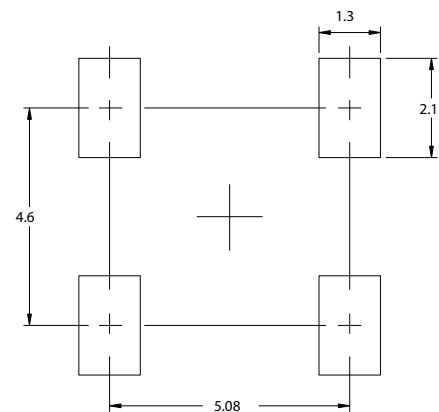
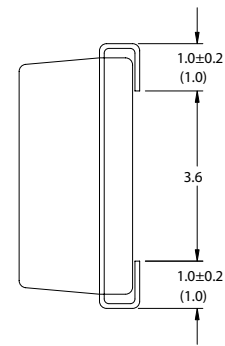
**Output Enable/Disable Timing**


**Ordering Information**

Part Number <sup>[1,2]</sup>	Package description	Product Flow
CY25702JXCZZZZ	4-Lead Plastic JE04A SMD – Lead-free	Commercial, –20° to 70°C
CY25702JXCZZZT	4-Lead Plastic JE04A SMD, Tape and Reel – Lead-free	Commercial, –20° to 70°C
CY25702FJXC	4-Lead Plastic JE04A SMD – Lead-free	Commercial, –20° to 70°C
CY25702FJXCT	4-Lead Plastic JE04A SMD, Tape and Reel – Lead-free	Commercial, –20° to 70°C
CY25702XCZZZ	4-Lead Plastic JE04B SMD – Lead-free	Commercial, –20° to 70°C
CY25702XCZZZT	4-Lead Plastic JE04B SMD, Tape and Reel – Lead-free	Commercial, –20° to 70°C
CY25702FXC	4-Lead Plastic JE04B SMD – Lead-free	Commercial, –20° to 70°C
CY25702FXCT	4-Lead Plastic JE04B SMD, Tape and Reel – Lead-free	Commercial, –20° to 70°C

**Package Drawings and Dimensions**
**4-Lead JEC JE04A**


DIMENSIONS IN MILLIMETERS  
 REFERENCE JEDEC: N/A  
 PKG. WEIGHT: 0.24 gms

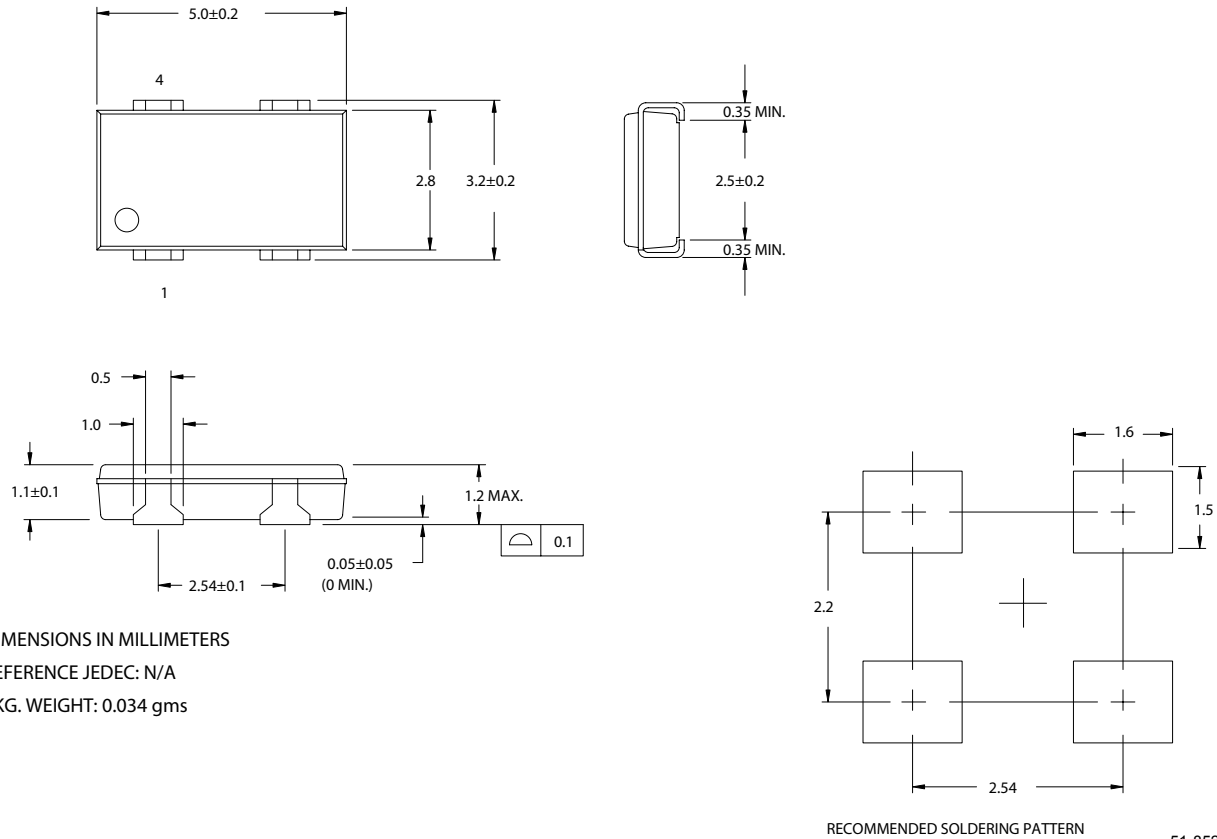


RECOMMENDED SOLDERING PATTERN

51-85204-\*A

**Notes:**

1. "ZZZZ" or "ZZZ" denotes the assigned product dash number. This number will be assigned by factory after the output frequency and spread percent programming data is received from the customer.
2. "FJXC" or "FX" suffix is used for products programmed in field by Cypress distributors.

**Package Drawings and Dimensions (continued)**
**4-Lead JE (5.0 x 2.8 MM) JE04B**


DIMENSIONS IN MILLIMETERS

REFERENCE JEDEC: N/A

PKG. WEIGHT: 0.034 gms

RECOMMENDED SOLDERING PATTERN

51-85212-\*\*

All product and company names mentioned in this document are the trademarks of their respective holders.

**Document History Page**

<b>Document Title: CY25702 Programmable High-Frequency Crystal Oscillator (XO)</b>				
<b>Document Number: 38-07721</b>				
<b>REV.</b>	<b>ECN NO.</b>	<b>Issue Date</b>	<b>Orig. of Change</b>	<b>Description of Change</b>
**	296081	See ECN	RGL	New data sheet
*A	333298	See ECN	RGL	Added Jitter Specifications Corrected the Ordering Information table to match the DevMaster