



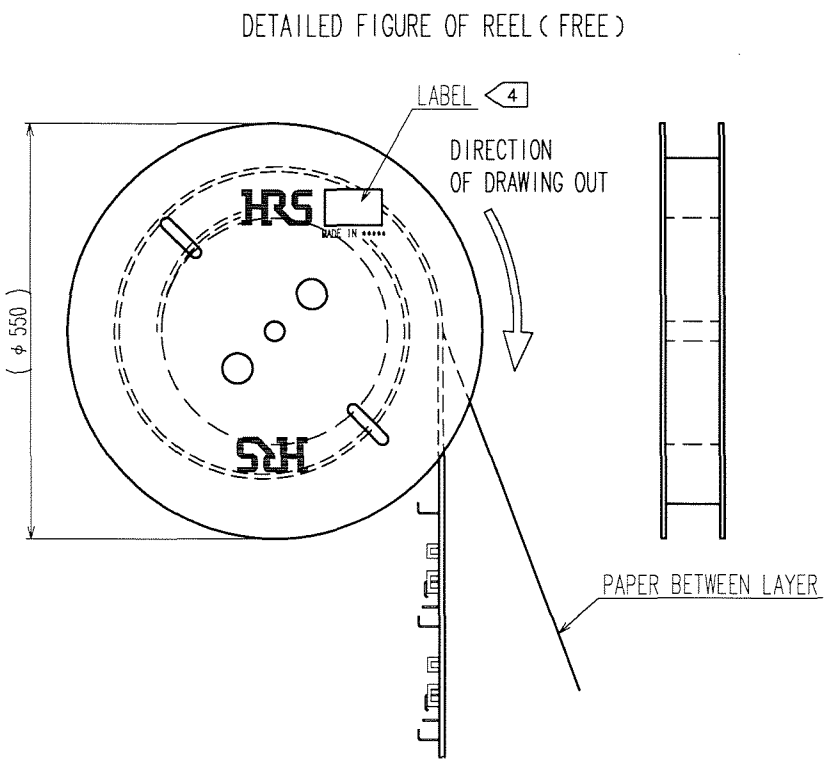


APPLICABLE STANDARD					
 RATING	OPERATING TEMPERATURE RANGE	-55 °C TO 85 °C ^{(1) (2)}	STORAGE TEMPERATURE RANGE	-10 °C TO 60 °C ⁽³⁾	
	VOLTAGE	60 V AC ⁽⁵⁾	OPERATING HUMIDITY RANGE	RH 85 % MAX ^{(2) (4)}	
	CURRENT	0.5 A ⁽⁵⁾	STORAGE HUMIDITY RANGE	RH 70 % MAX ^{(3) (4)}	
	APPLICABLE CABLE	FFC ⁽⁶⁾			
SPECIFICATIONS					
ITEM		TEST METHOD		REQUIREMENTS	QT AT
CONSTRUCTION					
GENERAL EXAMINATION		VISUALLY AND BY MEASURING INSTRUMENT.		ACCORDING TO DRAWING.	x x
MARKING		CONFIRMED VISUALLY.			x x
	COUNT	DESCRIPTION OF REVISIONS	DESIGNED	CHECKED	DATE
	2	DIS-F-004353	KN. SHIBUYA	HT. YAMAGUCHI	09.12.15
REMARKS (1) INCLUDE TEMPERATURE RISE CAUSED BY CURRENT-CARRYING. (2) OPERATING TEMPERATURE SHOULD BE -55 TO 40°C WHEN HUMIDITY EXCEEDS 80% RH. (3) THE SPECIFICATION IS APPLIED TO THE PRE-ASSEMBLED COMPONENT AND THE CABLE ASSEMBLED PRODUCT BOTH IN DELIVERY AND STORAGE, BEFORE ASSEMBLED TO PCB. (4) THERE MUST NOT BE DEWFALL. (5) IT IS THE MAXIMUM VALUE OF CONNECTOR. CONFIRM THE SPECIFICATION OF THE CABLE. (6) ONLY FFC THAT PROCESSES THE TERMINAL THAT WE SPECIFIED. Unless otherwise specified, refer to JIS-C-5402.			APPROVED	HS. OKAWA	08.02.13
			CHECKED	HT. YAMAGUCHI	08.02.13
			DESIGNED	KN. SHIBUYA	08.02.13
			DRAWN	KN. SHIBUYA	08.02.13
			Note QT:Qualification Test AT:Assurance Test X:Applicable Test		
	SPECIFICATION SHEET		PART NO.	FX16-21P-GND (A)	
	HIROSE ELECTRIC CO., LTD.		CODE NO.	CL575-3211-6-00	1/1

TO

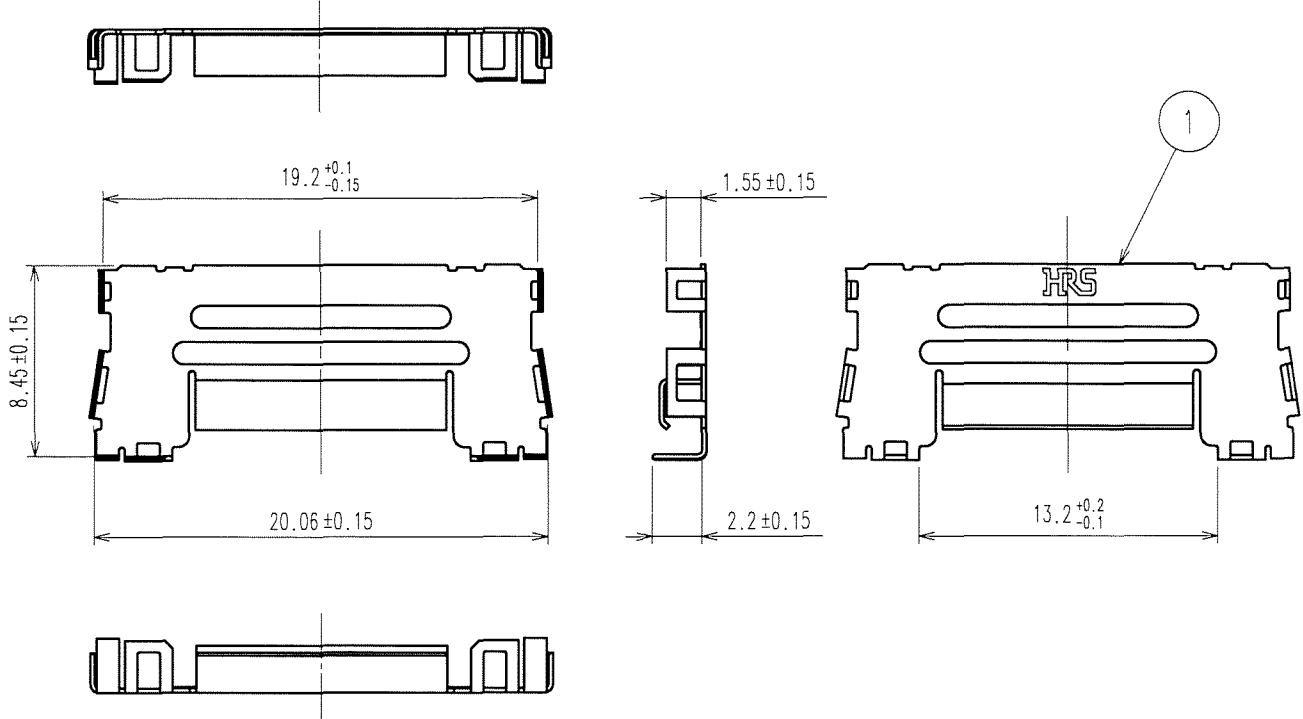

DETAILED FIGURE OF CAREER (2 : 1)

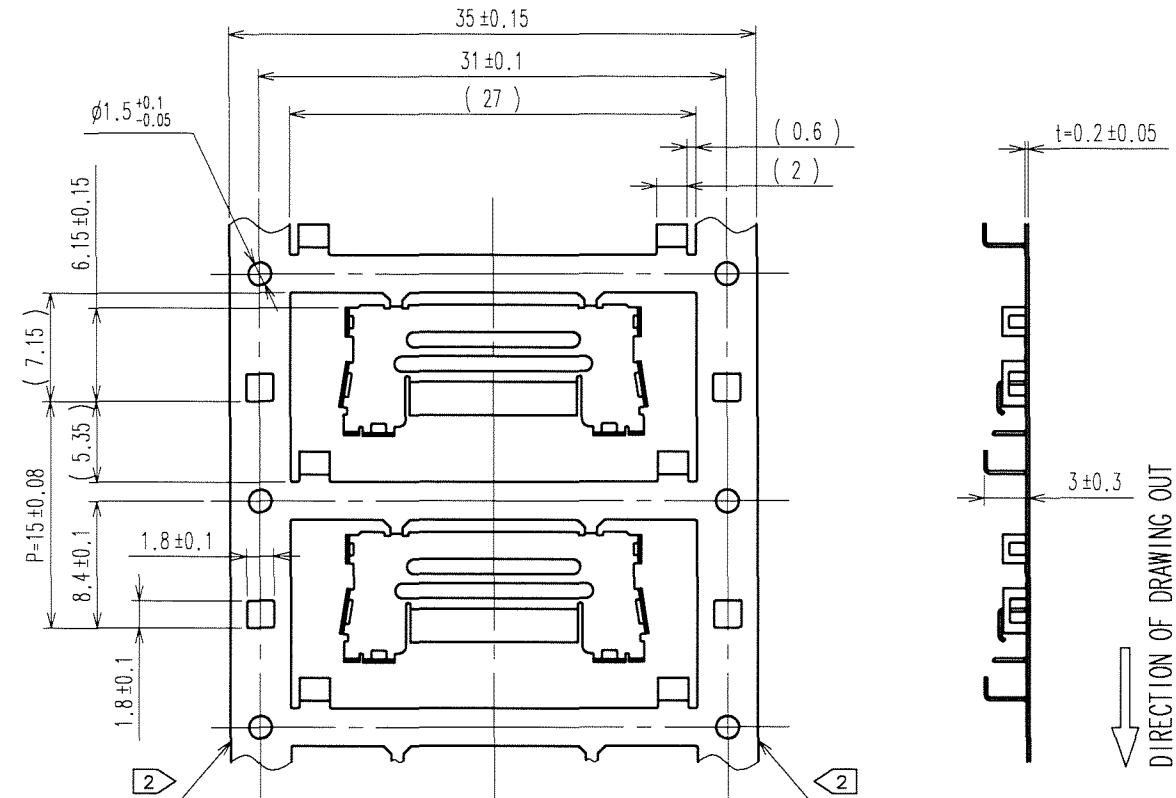

- NOTE 1. MANUFACTURING PROCESS COULD LEAVE SCRATCH AND/OR PUNCH MARKS HAVING NO AFFECT ON THE PRODUCT PERFORMANCE.
2. SIDE CUT CAN BE PROVIDED TO PREVENT CARRIER CURVE.
3. 2500 PIECES PER REEL.
4. LABEL AS SHOWN BELOW IS INDICATED.

HRS		INSPECTION 検査
CODE No. 品名コード	CL575-3211-6	
PART NO. 品名	FX16-21P-GND(A)	
QTY 数量	2,500 PCS	
PECULIAR 仕様		
Lot No		
SPLICE 継ぎ目		

5. DIMENSION IN () ARE FOR REFERENCE.
6. THIS IS A COMPONENT FOR SEPARATELY AVAILABLE PRODUCT;FX16-21P-0.5FC OR FX16-21P-0.5SD. WHEN FFC IS USED FOR THE CABLE, MAKE SURE TO USE WITH THE SPECIFIED COMBINATION.

NO.		MATERIAL		FINISH, REMARKS		1		STAINLESS			
CODE NO. (OLD) CL		DRAWN K. SHIBUYA 08.01.24		DESIGNED K. Shibuya 08.01.25		CHECKED H. Yamayachi 08.01.25		APPROVED H. Okawa 08.01.25		RELEASED .	
SCALE FREE		DRAWING NO. EDC3-157529		PART NO. FX16-21P-GND(A)		CODE NO. CL575-3211-6		1/1			
UNITS mm		HRS HIROSE ELECTRIC CO., LTD									