



So we did you a favor and tossed a small SRAM chip on the back. This chip shares the SPI port the eInk display uses, so you only need one extra pin. And, no more frame-buffering! You can use the SRAM to set up whatever you want to display, then shuffle data from SRAM to eInk when you're ready. The library we wrote does all the work for you, you can just interface with it as if it were an Adafruit\_GFX compatible display.

For ultra-low power usages, the onboard 3.3V regulator has the Enable pin brought out so you can shut down the power to the SRAM, MicroSD and display.


We even tossed on a MicroSD socket so you can store images, text files, whatever you like to display. Everything is 3 or 5V logic safe so you can use it with any and all microcontrollers.

Comes assembled and tested, with some header. You'll need a soldering iron to attach the header for breadboarding or installing into your project.

## TECHNICAL DETAILS

Product Dimensions: 62.0mm x 40.0mm x 5.0mm / 2.4" x 1.6" x 0.2"

Product Weight: 13.4g / 0.5oz

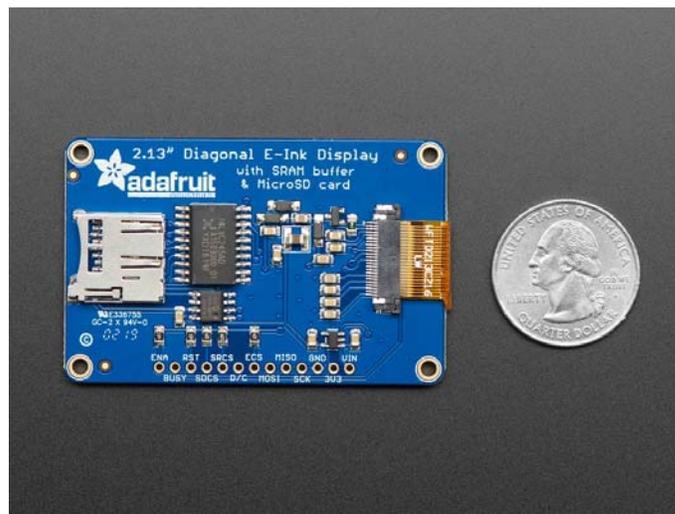

<https://www.adafruit.com/product/4086/2-5-19>