


NOTES:

- 1) LABELS ARE M23053/5 ,WHITE. ACCEPTABLE SUBSTITUTION IS DAT-38-292 OR TRANSVINYL (DAT-63-292-2.5).
- 2) TERMINUS ENFACE REQUIREMENTS SHALL MEET GR-326 AND IEC 61300-3-35.
- 3) MAX IL @ 850 nm SHALL BE 0.5 dB PER CONNECTION.

REVISION HISTORY – ALL SHEETS ARE AT THE SAME REVISION			
REV	DESCRIPTION	DATE	APPROVED
-	INITIAL RELEASE	2017/11/13	

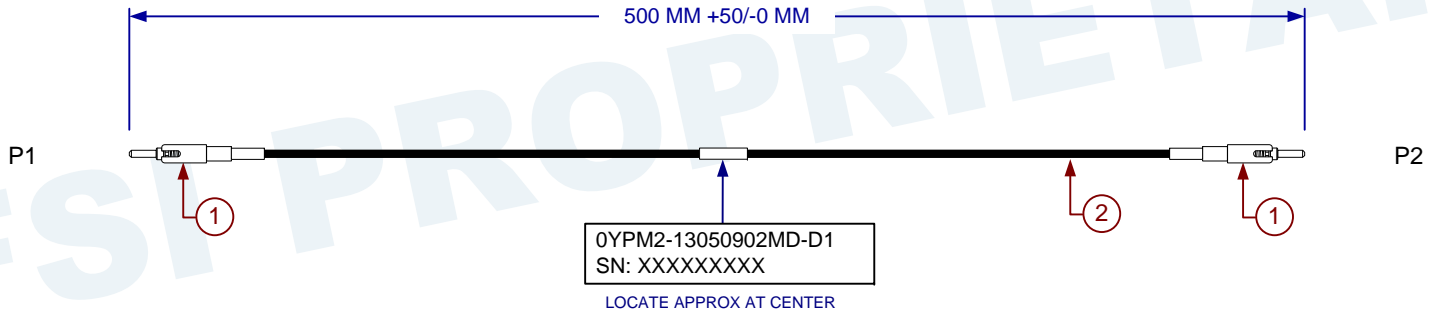

3	AFSI-PRE T BOX	BOX, SMALL FIBER CABLE 10X10X2 W/AFSI GRAPHICS	1
2	S012T-01-62X	CABLE, SIMPLEX FIBER, 62.5/125	2 FEET
1	M801-MS1N	ARINC 801 TERMINI, MM127, NON-PULL PROOF	2
ITEM NO.	PART NO.	DESCRIPTION	QTY/ LENGTH

MATERIAL:		DFTR/Designer: 2017/10/23 C. Hoang	Amphenol FSI
		Check By: 2017/10/24 B. Waite	
		Manufacturing: 2017/10/24 B. Waite	
		Market Manager/PLM: 2017/10/25 Q. Abraham	
DRILLED HOLE DIAMETER TOLERANCE		Configuration Management: 2017/11/13 L. Brown	TITLE: ARINC PIN TO PIN PATCHCORD, MM,62.5/125um
DO NOT SCALE DRAWING UNLESS OTHERWISE SPECIFIED DIMENSIONS ARE IN INCHES TOL ON ANGLES ±3° 1 PL ±.1 2 PL ±.02 3 PL ±.010 INTERPRET DIM AND TOL PER ASME 14.5M-1994		This Document contains proprietary information and such information is prohibited from disclosure to others, publication or duplication in whole or in part without written permission from Amphenol Fiber Systems International. Copyright © 2017 Amphenol Fiber Systems International. Non published work. All rights reserved.	
NEXT ASSY	USED ON	SIZE A	CAGE CODE 0YPM2
APPLICATION		DWG NO 13050902MD-D1	REV -
		SCALE: NONE	SHEET 1 OF 1