


TO SNAP LOCK IN A .156±.003
[4±.08] DIA. HOLE, IN A
.093 [2.4] PANEL THICKNESS

Ø .28 [7.1]
.10 [2.5]
.44 MAX [11.2 MAX]

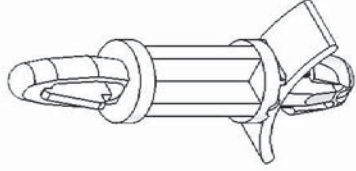

-TO SNAP-LOCK IN A .187±.003
[4.75±0.08] DIA. HOLE, IN A
.031-.078 [0.79-1.98] PANEL THICKNESS

3. ALTERNATE UNITS FOR REFERENCE ONLY.

3. ALTERNATE UNITS FOR REFERENCE ONLY.										TITLE: LOCKING CKT BD. SUPPORT, SPECIAL										UNITS: IN (mm)		FINAL		PRINT TYPE
E										DZ	10/24/2013	CREATED USING	FILE #	LCBSA-3	DWN: SK	APP: RT	PART #	SEE TABLE CA		UNIT: IN (mm)				
D										SK	12/02/2010	CHANGED PART NUMBER	SK	11/29/2010	SHEET: 1 OF 1	SHEET SIZE: A	DT: 08/24/06	CHKD: SJ		UNIT: IN (mm)				
C										SK	11/20/2006	REDRAWN SEE ECN #1208 FOR CHANGES	SK	11/20/2006	RE: RICHCO, INC.	RICHCO, INC.	ENG@RICHCO-INC.COM		UNIT: IN (mm)					
B										SM	10/04/2004	SEE ECN #662 FOR CHANGES	SM	10/04/2004	XX=+0.010	XXX=+0.005	(773) 539-4060		UNIT: IN (mm)					
A										SM	09/27/2001	UPDATED PRINT AND CHANGED FILE NUMBER	SM	09/27/2001	FRAC =+1/64	ANG =+1°			UNIT: IN (mm)					
REV:										DESCRIPTION	DATE								UNIT: IN (mm)					

SEE TABLE